



## TGS SPREADERS

# HEAVY-DUTY TAILGATE POWER AND PERFORMANCE.

The easiest way to arm yourself against snow and ice is with BOSS TGS Spreaders. Our tailgate-mounted spreaders easily attach and quickly and efficiently disperse deicing materials.

SEE IT IN ACTION



### TAILGATE MOUNTED

**12-VOLT ELECTRIC HIGH-TORQUE SPINNER MOTOR**

**12" DIAMETER URETHANE SPINNER**

## STANDARD FEATURES

**Adjustable Feed Gate** allows you to adjust the material discharge amount. (Optional on TGS 300. TGS 300 includes Material Saver System.)

**Poly Adjustable Material Deflector** allows you to adjust the material discharge width and direction pattern.

**12" Diameter Urethane Spinner** is durable and corrosion-resistant, ensuring consistent distribution.

**Enclosed 12-Volt Electric High-Torque Spinner Motor** is weather and dust resistant to ensure performance, durability and reliability.

**Low-Profile Poly Hopper Design** provides better visibility.

**Variable Speed Control** with LED digital display is equipped with blast feature and overload protection.

**Choose Your Attachment System** with a slide-in system, 3-Point Hitch (Category 1) or the RT3 system. (Not available on TGS 300.)

**Solid Poly Hopper Cover** protects against weather and is made to last.

**Stabilizer Arms and Tie-Down Straps** minimize any side-to-side movement. (Not available on TGS 300.)

**Top Screen With Bag Splitter** easily opens bags and filters deicing material. (Bag splitter not included on TGS 300.)

**Enclosed Feed Motor** powers the feed paddle mechanism with 12 volts of high-torque electric power (TGS 800 only).

**Swing-Away Spinner Assembly** allows for quick removal of leftover material (TGS 800 only).


**Material Saver System** eliminates material flow of fine deicers when spreader is in transport (TGS 300 only).

## OPTIONAL ACCESSORIES



- TGS Vibrator Kit\*
- RT3 Attachment System\*
- Material Saver System\*\*
- Category 1, 3-Point Hitch\*
- Hitch Reducer 2½" to 2"

\*Excludes TGS 300 | \*\*Standard on TGS 300



Optional RT3 Attachment System allows you to easily attach and detach your spreader. (Not available on TGS 300.) Scan the QR code to see it in action.

TGS 300



TGS 600



TGS 800



TGS 1100



## MODELS & SPECIFICATIONS

SPECS	MODEL			
	TGS 300*	TGS 600*	TGS 800**	TGS 1100**
Hopper Capacity Limit***	3 cu ft   200 lb (0.09 cu m   91 kg)	6 cu ft   400 lb (0.17 cu m   181 kg)	8 cu ft   780 lb (0.23 cu m   354 kg)	11 cu ft   800 lb (0.31 cu m   363 kg)
Hopper Dimensions	22"H x 29"W x 15"D (56 cm x 74 cm x 38 cm)	26"H x 38"W x 21"D (65 cm x 97 cm x 53 cm)	48"H x 36"W x 21"D (122 cm x 91 cm x 53 cm)	34"H x 44"W x 24"D (86 cm x 112 cm x 61 cm)
Spreading Width	4' - 30' (1 - 9 m)	4' - 30' (1 - 9 m)	4' - 20' (1 - 6 m)	4' - 30' (1 - 9 m)
Spreader Weight	70 lb (32 kg) plus mount	101 lb (46 kg) plus mount	220 lb (100 kg) plus mount	152 lb (69 kg) plus mount

SCAN FOR FULL SPECIFICATIONS




The selection of proper deicing materials can be complex and varies by personal preference, experience and environmental concerns. All factors should be considered before making your selection.

\*Designed to spread dry, free-flowing material (i.e., salt, deicers, etc.). \*\*Designed to spread sand, salt or a combination of both. See Spreader Materials Guide on Page 27 for more details on material spreading options. \*\*\*Capacity weight max.

# SPREADER MATERIAL GUIDE.



DOWNLOAD HERE

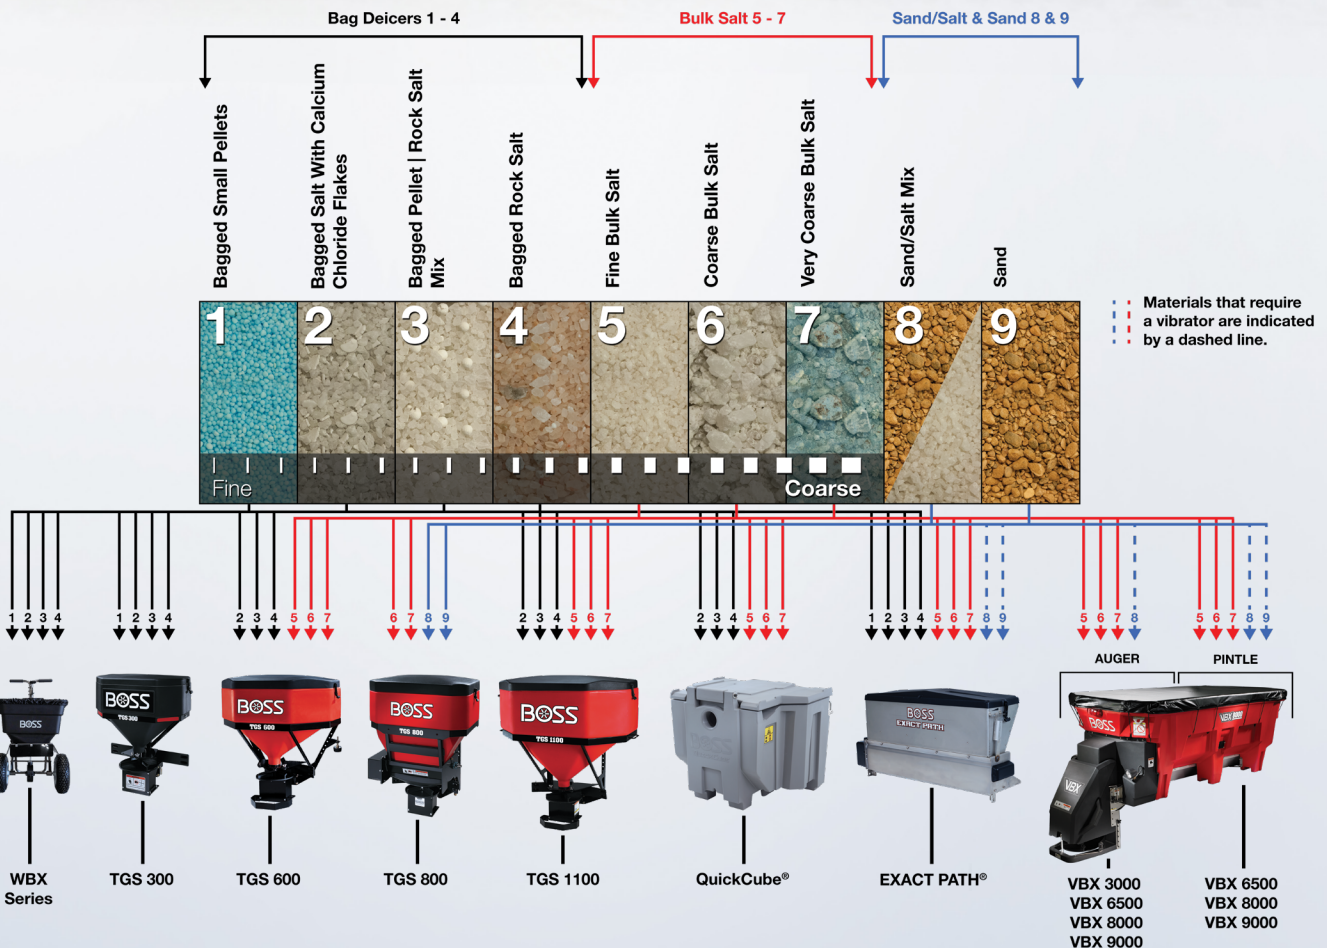

**NOTE:** Assumes dry, free-flowing material. Vibrators should not run continuously. The selection of proper deicing materials can be complex and varies by personal preference, experience and environmental concerns. All factors should be considered before making your selection.