



VBX SPREADERS

SPEED, POWER AND PRODUCTIVITY.

Add these powerful tools to your snow and ice removal arsenal. BOSS VBX Spreaders are built to make your work easier and more productive.

BOSS VBX Spreaders work with a variety of deicing materials to fit the job at hand. See the Spreader Materials Guide on page 27 to learn more.



WATCH A
PRODUCT
OVERVIEW



**DURABLE
POLY HOPPER**

**POWERFUL
ELECTRIC MOTORS**

**SPREADS VARIOUS
DEICING MATERIALS**

STANDARD FEATURES

Poly Hopper is built to outlast the elements.

Material Feed System features a heavy-duty pintle chain or powder-coated auger for long life and durability.

Dual Variable Speed Controller is equipped with auto-reverse (auger only) and overload protection.

Full-Length Slide-Out Tray captures falling deicing material, keeping it away from truck bed, preventing corrosion (pintle chain only).

LCD Screen In-Cab Controller is backlit for clear visibility and ease of use.

14.5" Diameter Urethane Spinner is durable and corrosion-resistant, ensuring consistent distribution.

Enclosed Spinner Motor is weather and dust resistant to ensure performance, durability and reliability.

Tarp With Integrated Tie-Downs protects material from the elements.

Dual Vibrators reduce material bridging for ease of operation (standard for auger; optional for pintle).

Inverted V-Baffle reduces material build-up for optimal spreading efficiency (standard for auger; optional for pintle).

Chain Cleaning Brush removes excess material from chain on every pass (pintle chain only).

OPTIONAL ACCESSORIES



- Backup Camera
- Pre-Wet
- LED Light Upgrade Kit
- Inverted V*
- Vibrator Kit*
- License Plate Light
- Pintle Feed Gate**

*Standard on auger; optional on pintle.

**Only available on pintle.

PRE-WET

Optional pre-wet allows contractors to pre-wet solid deicing material, improving material performance. (Limited availability; see dealers for details.)



VBX 9000
3 cu yd of capacity

Pre-Wet
Available on new VBX spreaders. (Excludes VBX 3000. Limited availability; see dealers for details.)



MODELS & SPECIFICATIONS

SPECS	MODEL		
	VBX 6500 AUGER PINTLE CHAIN	VBX 8000 AUGER PINTLE CHAIN	VBX 9000 AUGER PINTLE CHAIN
Hopper Capacity	1.5 cu yd (1.15 cu m)	2 cu yd (1.5 cu m)	3 cu yd (2.3 cu m)
Hopper Height	38" (97 cm)	38" (97 cm)	49" (125 cm)
Hopper Length	78" (198 cm)	96" (244 cm)	108" (274 cm)
Hopper Width	48.25" (123 cm)	48.25" (123 cm)	48" (122 cm)
Minimum Bed Length	66" (168 cm)	78" (198 cm)	96" (244 cm)
Spreading Width	2' - 40' (0.6 m - 12 m) dry, free-flowing material	2' - 40' (0.6 m - 12 m) dry, free-flowing material	2' - 40' (0.6 m - 12 m) dry, free-flowing material
Complete Unit Weight (Empty)	550 lb (250 kg) 600 lb (272 kg)	600 lb (272 kg) 650 lb (295 kg)	710 lb (322 kg) 760 lb (345 kg)

The selection of proper deicing materials can be complex and varies by personal preference, experience and environmental concerns. All factors should be considered before making your selection.


See Spreader Materials Guide on page 27 for more details on material spreading options.

SCAN FOR FULL SPECIFICATIONS



SPREADER MATERIAL GUIDE.

DOWNLOAD HERE

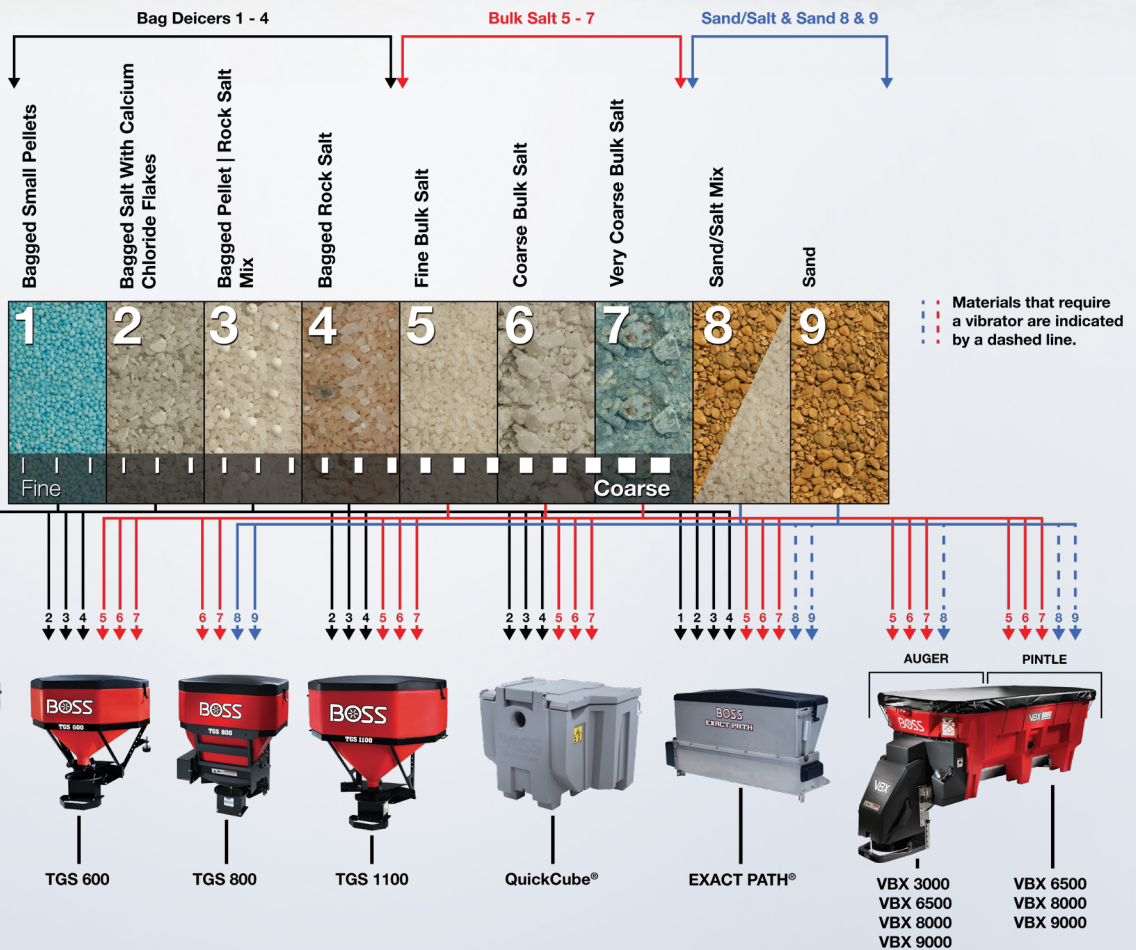

NOTE: Assumes dry, free-flowing material. Vibrators should not run continuously. The selection of proper deicing materials can be complex and varies by personal preference, experience and environmental concerns. All factors should be considered before making your selection.